



NexSys[®]
TPPL

NexSys[®]
TPPL

NEXSYS[®] TPPL BLOC BATTERIES
THE NEXT-GENERATION OF
THIN PLATE PURE LEAD (TPPL)
TECHNOLOGY



EnerSys[®]
Power/Full Solutions

TRUST THE POWER OF

NexSys® TPPL

NexSys® TPPL (Thin Plate Pure Lead) bloc batteries provide a highly effective energy storage solution that is compact, safe and straight-forward to use, while also offering elevated performance characteristics.

NexSys® TPPL bloc batteries provide exceptional flexibility. Use them whenever you want and recharge them whenever you can – during breaks, or at the end of the shift. NexSys® TPPL bloc batteries can even be put back into service before they are fully charged.

Combining advanced Thin Plate Pure Lead (TPPL) bloc design with robust materials and construction, NexSys® TPPL bloc batteries provide excellent performance, are highly resistant to shock and vibration and will literally change the way you work!



BATTERIES THAT ARE READY TO WORK

NexSys® TPPL bloc batteries feature proprietary Thin Plate Pure Lead (TPPL) technology, which makes them energy-dense, virtually maintenance-free and ideal for opportunity and fast charging. They also deliver significantly longer run times and life compared to flooded or gel batteries.



ENHANCED FEATURES

The key features and benefits of NexSys® TPPL bloc batteries are summarised below:



THIN PLATE PURE LEAD (TPPL) TECHNOLOGY

- Thin plate structure results in higher energy throughput
- Up to 20% more power than the same sized conventional battery
- TPPL batteries are 99% recyclable



Minimum gassing
ideal in sensitive areas

SAFEGUARDS OPERATIONS AND OPERATORS

- Sealed construction – no acid exposure, spills or messes
- Minimal gassing – ideal for operation in sensitive areas

RECHARGE



A MORE FLEXIBLE WORKFLOW


- Full recharge in less than 2 hours
- Opportunity charging during breaks or at the end of a shift for maximum flexibility and convenience



Virtually
maintenance-free

LOW UPKEEP AND MORE PRODUCTIVITY

- Virtually maintenance-free: no watering, changing or equalization
- Longer shelf life – up to TWO years when fully charged (at 20°C)



cycle life

DESIGN THAT POWERS PRODUCTIVITY

- Excellent cycle life: optimized cycling performance and high energy throughput
- Up to 1,500 cycles at 60% Depth of Discharge (DOD)



Integrated Data

INTEGRATED DATA COMMUNICATION

- Automatic alerts when it's time to recharge
- Intuitive battery monitoring and data capture capabilities



MAIN APPLICATIONS INCLUDE:


- FLOOR CARE AND CLEANING MACHINES
- SHUTTLES/PERSONNEL CARRIERS
- INDUSTRIAL UTILITY VEHICLES
- AERIAL LIFTS AND PLATFORMS
- AUTOMATED GUIDED VEHICLES (AGV)
- GOLF CARTS

Opportunity charging NexSys® TPPL bloc batteries means they are able to deliver up to 160% energy throughput on a daily basis meaning longer run time and less unproductive downtime. Avoiding deep discharges, helps to extend the longevity of these batteries.

MAXIMUM POWER IN LESS SPACE

NexSys® TPPL bloc batteries are constructed with pure lead plates, which are extremely thin, so more of them fit into the battery. More plates, means more power – up to 20% more power than the same sized conventional battery.

Simple, powerful and compact, NexSys® TPPL bloc batteries are easy to handle and deliver optimal performance in commercial and industrial floorcare applications.

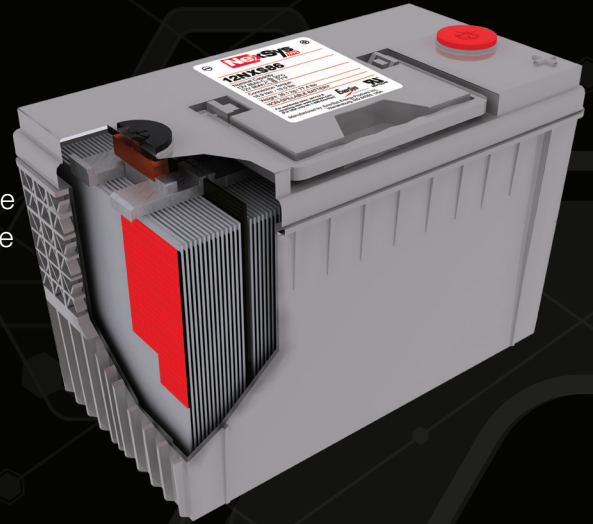

NEXSYS® TPPL BLOC BATTERY SPECIFICATION OPTIONS AVAILABLE:

Battery type	Voltage (V)	Nominal Ah Capacity @ the C5 rate	Nominal Ah Capacity @ the C20 rate	Nominal Dimensions								Nominal Weight		Standard terminals	Terminal Adapter options	Terminal Layout
				L		W		H		Terminal Height		lbs	kg			
				in	mm	in	mm	in	mm	in	mm					
12NXP26	12	26	30	9,84	250	3,82	97	5,79	147	5,67	144	21,1	9,6	M6 Female	A	1
12NXP36	12	36	42	9,84	250	3,82	97	7,76	197	7,64	194	29	13,2	M6 Female	A	1
12NXP38	12	38	42	7,74	197	6,5	165	6,69	170	6,37	162	38,4	17,4	M6 Female	A	1
12NXP50	12	50	56	8,66	220	4,76	121	9,92	252	9,76	248	41	18,6	M6 Female	A	1
12NXP61	12	61	63	11,02	280	3,82	97	10,39	264	9,76	248	42	19,1	M8 Female	B	2
12NXP62	12	62	65	12,95	329	6,54	166	6,85	174	6,54	166	53,1	24,1	M6 Female	A	1
12NXP85	12	85	97	15,55	395	4,13	105	10,39	264	9,76	248	60	27,2	M8 Female	B	2
12NXP86	12	86	100	12,99	330	6,79	172	8,43	214	8,62	219	77,4	35,1	3/8"-16 Female	A	4
12NXP90	12	90	104	11,89	302	6,89	175	8,78	223	8,94	227	69,45	31,5	M6 Female	A	3
12NXP120	12	120	128	13,31	338	6,81	173	10,71	272	10,75	273	94,8	43,0	M6 Female	A	3
12NXP137	12	137	154	16,9	429	6,79	172	9,36	238	9,36	238	105	47,6	M6 Female	B	2
12NXP157	12	157	183	16,9	429	6,79	172	10,75	273	10,75	273	117	53,1	M6 Female	B	2
12NXP166	12	166	187	22,09	561	4,92	125	11,14	283	10,35	263	113,3	51,4	M8 Female	B	2
12NXP186	12	186	210	22,09	561	4,92	125	12,48	317	11,69	297	131,1	59,5	M8 Female	B	2

CHARGING SOLUTIONS FROM ENERSYS®

Our charging systems provide flexible, modular designs – sized and tuned with charging profiles specific to your battery technologies and operating parameters.

- IMPAQ™ battery chargers and NexSys®+ battery chargers offer a better value in high frequency charging and include the proprietary NexSys® TPPL bloc and standard charge profiles.
- Using EnerSys® high-frequency Charging Solutions, lowers TCO (Total Cost of Ownership) by reducing maintenance and energy costs.
- Low-component designs offer flexibility, safety and reliability.





Our battery support services range from system design, installation and certification to testing, maintenance and repair.



Our comprehensive recycling support program accepts lead acid batteries of all sizes, from all manufacturers.



Our advanced tools and technologies deliver actionable intelligence to optimize battery maintenance and operation.



EnerSys World Headquarters

2366 Bernville Road
Reading,
PA 19605, USA

www.enersys.com

EnerSys EMEA

EH Europe GmbH
Baarerstrasse 18
6300 Zug, Switzerland

EnerSys Asia

152 Beach Road
Gateway East Building #11-08
Singapore 189721